


## CENTRÍFUGA SUBMERSA

PARA POÇOS Ø MIN.4"



**ROTOR**   
 DIÂMETRO **77.80** mm   
 LARGURA **10.00** mm   
 RECALQUE **2"** BSP   
 ROTAÇÃO **3500** rpm   
 FREQUÊNCIA **60** Hz   
 DIÂMETRO EXTERNO **97** mm   
 ESTÁGIOS **MÍN. 5**  
**MÁX. 29**

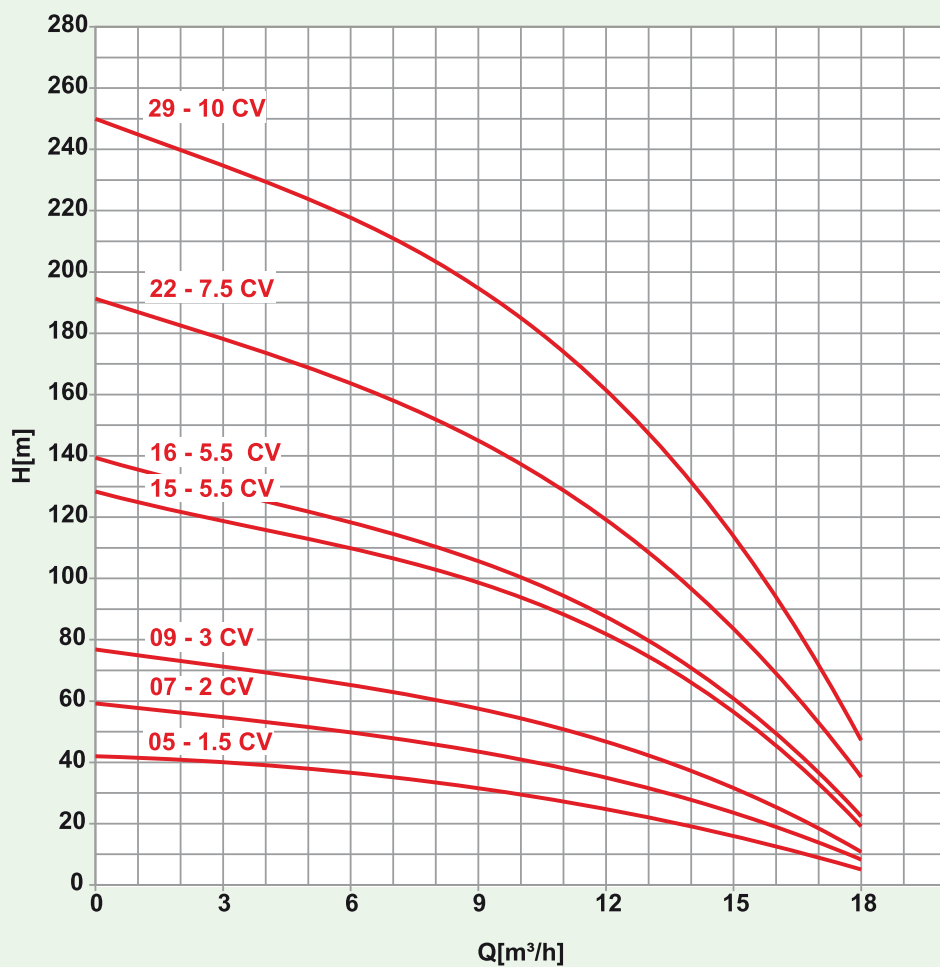

| MODELO   | CV   | ESTÁGIOS | RECALQUE | ALTURA MÁXIMA (Metros) | VAZÃO (Metros Cúbicos por Hora) |     |     |      |      |      |
|----------|------|----------|----------|------------------------|---------------------------------|-----|-----|------|------|------|
|          |      |          |          |                        | 3,0                             | 6,0 | 9,0 | 12,0 | 15,0 | 18,0 |
| TSM-5505 | 1,5  | 5        | 2"       | 42                     | 40                              | 37  | 31  | 25   | 16   | 5    |
| TSM-5507 | 2,0  | 7        | 2"       | 59,5                   | 54                              | 50  | 44  | 35   | 23   | 8,5  |
| TSM-5509 | 3,0  | 9        | 2"       | 77                     | 71                              | 65  | 58  | 47   | 31   | 11   |
| TSM-5515 | 5,5  | 15       | 2"       | 128                    | 119,5                           | 110 | 98  | 81   | 58   | 18,5 |
| TSM-5516 | 5,5  | 16       | 2"       | 139                    | 129,5                           | 118 | 105 | 87,5 | 61,5 | 22   |
| TSM-5522 | 7,5  | 22       | 2"       | 191                    | 179                             | 163 | 145 | 119  | 84   | 35   |
| TSM-5529 | 10,0 | 29       | 2"       | 250,5                  | 234                             | 216 | 198 | 161  | 112  | 48   |